



NEROLAC NEU LATEX INTERIOR PAINT

PRODUCT DESCRIPTION

Nerolac Neu Latex Interior Paint is an economical water thinnable paint specially designed for application on interior walls with good washability.

PERFORMANCE FEATURES & BENEFITS

	Superior smoothness		Good washability
	Good flow & levelling		Better durability
	Good ease of application		Better whiteness
	Higher coverage		Better overall look on wall

SURFACE PREPARATION

1. Rub the surface using a suitable abrasive paper and wipe it off to ensure that the surface is clean, dry and free from dirt, grease, wax or any other defective or poorly adhering material.
2. Treat fungus affected areas with Nerolac Fungicidal Solution and allow it to react for 6-8 Hrs.
3. Apply a coat of suitable primer**. Allow it to dry for 4-6 hrs. Apply two coats of Nerolac Wall Putty## to level the dents & make the surface uniform with 6-8 hrs of drying in between the coats. Sand the surface with emery paper no. 180 to make the surface smooth & wipe clean.
4. Apply a coat of suitable primer**. Allow it to dry for 4-6 hrs. Sand the surface with emery paper no. 320 and wipe clean.
5. Apply 2-3 coats of Nerolac Neu Latex Interior Paint after thinning 1 Kg paint with 300-350 ml of clean water with 4-6 hrs of drying in between the coats.

RECOMMENDED SYSTEM FOR APPLICATION:

1. Primer** (1 coat), Dry for 4-6 hrs.
2. Putty## (1st coat), Dry for 6-8 hrs.
3. Putty## (2nd coat), Dry for 6-8 hrs.
4. Primer** (1 coat), Dry for 4-6 hrs.
5. Finish Nerolac Neu Latex Interior Paint (2-3 coats), Dry min for 3-4 hrs. in between coats.

** Nerolac Premium Interior Primer (WT) / Nerolac Popular Interior Primer (WT) / Nerolac Economy Interior Primer (WT).

Nerolac Wall putty or Nerolac Cement putty.

Application (For new masonry surfaces)

Follow steps 1 to 5.

For Repainting on Smooth Lime / Distemper / Emulsion / Enamel Masonry Surfaces.


Sand the surface with emery paper and wipe clean before application of subsequent coat.

Skip steps 1 to 3 and follow steps 4 to 5.

PRECAUTIONS

1. Refer MSDS for "Nerolac Neu latex Interior Paint" for safety measures & precautions.
2. Store in well ambient conditions, ventilated locations & away from the source of ignition and fire.
3. Keep away from children.
4. In case of eye / skin contact, wash with plenty of water.
5. Inhalation / Injection will cause danger. In either case, move to fresh air & consult medical practitioners in both the cases.
6. Do not apply when ambient temperature might drop to level below 10°C within 4 Hrs. of application.
7. New plaster should be allowed to cure for minimum 12 weeks.
8. Avoid extra thinning for better results.
9. Can be tinted with Nerolac Hi-Power Universal Stainer before thinning. Do not add more than 5% of Nerolac Hi-Power Universal Stainer. Stir the tinted paint well, after tinting & before application.
10. The container must be tightly closed when not in use. Stir well and strain before use.
11. Use safety equipment's like rubber or polythene gloves, safety goggles / glasses & face mask

TECHNICAL DATA

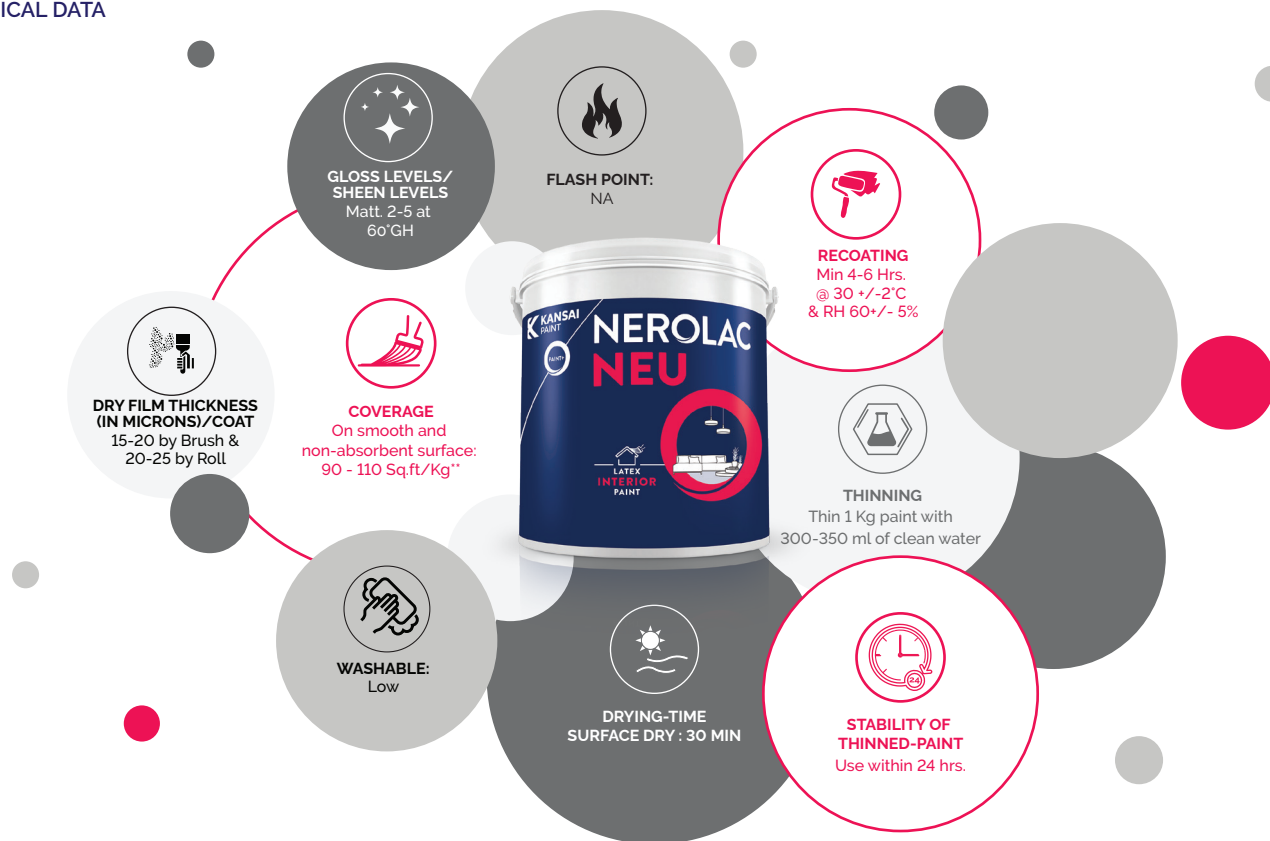

**Coverage: when applied as per recommended process in PDS. Actual coverage may vary from the quoted value due to factors such as method and condition of application and surface roughness and porosity.

POST APPLICATION INSTRUCTIONS

Surfaces painted with Nerolac Neu Latex Interior Paint is washable by sponging with mild soap and water after a minimum of 2 weeks drying to remove ordinary stains and everyday dirt.



SAFETY FEATURES

Non-Flammable



PACK SIZE

2Kg, 5Kg, 10Kg & 20Kg



SHADE RANGE

As per Nerolac Color Scapes Fandecor and shade card



SHELF LIFE

2 years from the date of manufacturing, when stored in the original tightly closed containers, away from direct sunlight and excessive heat

DISCLAIMER

The product information and application details given by the company has been provided in good faith and is meant to serve only as a general guideline during usage. The performance claims made are based on the tests carried out under controlled conditions and our past experience with the type of products. Therefore, actual performance will depend on local factors prevailing at that point of time. Users are advised to carry-out sample tests by taking trials to ensure the suitability of products for their requirement prior to full-scale usage of our products.