



# NEROLAC


## EXCEL EVERLAST

SELF-CLEANING EXTERIOR PAINT

### PRODUCT DESCRIPTION

Nerolac Excel Everlast, with pliolite is a specially designed solvent based exterior coating having superior properties with respect to protection of masonry surfaces from aggressive environmental conditions. It is formulated by using ideal combination of true pigments and special type of extenders, dispersed in a balanced combination of different grades of Styrene of Acrylate Resins and plasticized with ultra violet stabilized grade of plasticizer.

### PERFORMANCE FEATURES & BENEFITS

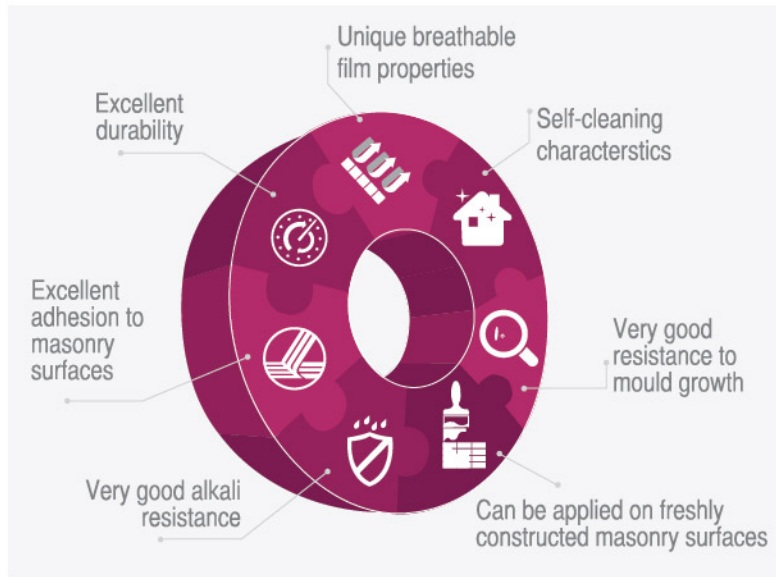

### RECOMMENDED USAGE

For painting of the exterior surfaces of houses, architectural buildings, bridges, etc., where masonry surface needs to be protected from adverse climatic conditions.

### RECOMMENDED SYSTEM FOR APPLICATION

1 Primer\*\* (1 coat) Dry in 4 - 6 hrs.

2 Finish Coat (2-3 coats) Nerolac Excel Everlast Self Cleaning Exterior Paint  
Dry min. 4-6 hrs. in between coats.

For Repainting

1 Primer\*\* (1 coat) Proper Curing

2 Finish Coat (2-3 coats) Nerolac Excel Everlast Self Cleaning Exterior Paint  
(2 coats) Dry min. 4 hrs. in between coats.

For New Surfaces

### SURFACE PREPARATION

- 1 The surface to be painted must be free of all dust, grease, traces of paint flakes, algae, fungus, etc.
- 2 The surface previously coated with paint must be cleaned thoroughly with a stiff wire brush, to remove dust, dirt, chalking or any friable material & loose flakes.
- 3 Wash thoroughly with water and allow to dry. This ensures proper adhesion of the new paint system.
- 4 In case of fungus affected area apply a liberal coat of Nerolac Fungicidal Solution. Allow it to react for minimum 6-8 hrs.
- 5 For Parapet tops and other horizontal surfaces, application of 3 coats is recommended.
- 6 All structural cracks must be open in V shape and filled with Cement / Cement based Plasters and leakage should be stopped, before actual painting.
- 7 Freshly plastered surfaces must be allowed to cure completely. Apply top coats as follows.

## TECHNICAL DATA



### COVERAGE\*\*\*

6.51 – 8.36 square metre per litre per coat



### DRYING TIME

Surface Dry: Max. 1 hr.



### RECOATING

Min. 4 - 6 hrs. (@27<sup>o</sup> ± 2<sup>o</sup>C & RH 60 ± 5%)



### GLOSS LEVELS/SHEEN LEVELS

Matt



### DRY FILM THICKNESS (IN MICRONS) /COAT

20-25

**THINNING**  
20 - 30% by volume using Nerolac General Purpose Thinner.



**FLASH POINT**  
Not below 30°C



**STABILITY OF THINNED PAINT**  
Use within 24 hrs



**WASHABLE**  
Low



\*\*\*Actual covering capacity may vary depending upon the method & condition of application, surface condition, temperature, wind velocity, application skills, surface roughness, surface porosity & shade.

## PRECAUTIONS



1. Refer to the MSDS for "Nerolac Excel Everlast Pliolite based Exterior wall finish" for safety measures & precautions.
2. Store in well ambient conditions, ventilated locations & away from the source of ignition and fire.
3. Keep away from children.
4. In case of eye I skin contact wash with plenty of water.
5. Inhalation I Injection is dangerous. In either case, move to fresh air & consult medical practitioners.
6. Do not apply when ambient temperature might drop to level below 10°C within 4 hrs of application.
7. New plaster should be allowed to cure for minimum 12 weeks.
8. Avoid extra thinning for better results.
9. Do not use universal stainers. Stir paint well before application.
10. The container must be tightly closed when not in use. Stir the paint well and strain before use.
11. Use safety equipments like rubber or polythene gloves, safety goggles / glasses & face mask.

## POST APPLICATION INSTRUCTION

For the best performance of the paint, ensure proper washing and cleaning of all algae and fungal growth at regular intervals of six months.

## SAFETY FEATURES:

Flammable.

PACK SIZES: 

20 ltrs.

SHADE RANGE: 

As per Color Scapes fandeck and shade card.

NO. OF SHADES POSSIBLE:

According to Colourscape Fandeck

## SHELF LIFE & STORAGE

- Shelf life is 24 months from the date of manufacturing in unopened condition
- Store in a cool & dry place
- Keep away from direct sunlight
- Thinned paint to be consumed within 24 Hrs after thinning

