



# NEROLAC

## LOTUS TOUCH


RICH SMOOTH FINISH INTERIOR EMULSION



### PRODUCT DESCRIPTION

Nerolac Lotus Touch Rich Smooth Finish Interior Emulsion Paint meant for interior wall finishing applications to render the wall with a rich look and elegant sheen. It is based on emulsion polymer made with novel chemistry, to impart good, durable, smooth finish, with good bonding to the substrate.

### PERFORMANCE FEATURES & BENEFITS

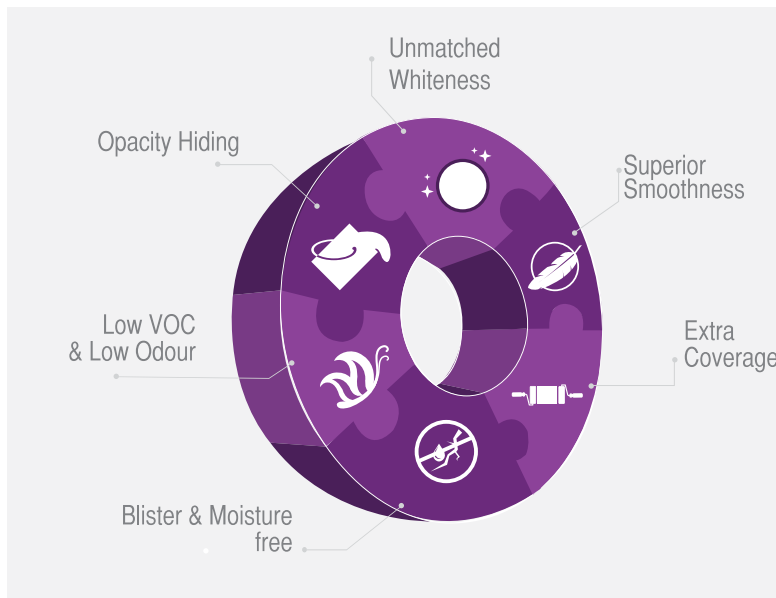

### RECOMMENDED USAGE

It is recommended for interior application to a wide variety of new or previously painted surfaces such as plaster, brickwork, cement rendering, concrete, hardboard, building boards, etc. It can be applied on ceilings and wall surfaces where a matt finish, free-from- irritating-glare due to light reflection, is desired.

### RECOMMENDED SYSTEM FOR APPLICATION

#### For New Masonry Surfaces

1 Primer\*\* (1 coat) Dry in 4 - 6 hrs.

2 Putty### Dry in 6 - 8 hrs.

3 Primer\*\* (1 coat) Dry in 4 - 6 hrs.

4 Finish Nerolac Lotus Touch Rich Smooth Finish Interior Emulsion (2-3 coats)  
Dry min. 4-6 hrs. in between coats.

Sand the surface with Emery paper and wipe clean before application of subsequent coat.

\*\*Nerolac Cement Primer (water thinnable /solvent thinnable) or Goody Universal Primer (Solvent thinnable) or Goody water thinnable Cement Primer  
###Nerolac Wall Putty or Nerolac Cement Putty

#Minimum 8 hrs for Solvent Thinnable Primer & minimum 4-6 hrs for Water Thinnable Primer

### SURFACE PREPARATION

1 Ensure the surface is clean, dry, # free from all defective or poorly adhering material, dirt, grease, wax etc. Remove all loose or poorly adhering materials by rubbing down, using suitable abrasive paper and thereafter wipe off.

2 Treat fungus-affected area using Nerolac Fungicidal Solution. Allow to react for 6 - 8 hrs.

3 Apply a coat of suitable Primer\*\* followed by Nerolac Wall Putty\* to level the dents and make the surface uniform.

4 Apply again a coat of suitable Primer\*\*.

5 Then apply two to three coats of Nerolac Lotus Touch Rich Smooth Finish Interior Emulsion.

For Repainting on Smooth Lime / Distemper / Emulsion / Enamel Masonry Surfaces skip steps 1 and 2 and start with step 3

## TECHNICAL DATA



### COVERAGE\*\*\*

On smooth and non-absorbent surface  
25.08-27.87 sq. mt/ltr/coat



### DRYING TIME

Surface Dry: 30 minutes



### RECOATING

Min. 4 - 6 hrs. (@27<sup>o</sup>± 2<sup>o</sup>C & RH 60 ± 5%)



### GLOSS LEVELS/SHEEN LEVELS

Sheen



### VOC IN GM/KG OR GM/L

< 50 gms/ltr



### THINNING

50 - 60% by volume using water.



### FLASH POINT

NA



### STABILITY OF THINNED PAINT

Use within 24 hrs



### DRY FILM THICKNESS (IN MICRONS) /COAT

20-25 : Brush  
35-40 : Roller



### WASHABLE

Moderate



\*\*\*Actual coverage may vary depending on Method, Condition of Application, Type of Tools, Surface Porosity & Shade. Use of Felt Roller may reduce coverage upto 50%.

## PRECAUTIONS



1. Refer MSDS for "Nerolac Lotus Touch Rich Smooth Finish Interior Emulsion" for safety measures & precautions.
2. Store in well-ambient conditions, ventilated locations & away from sources of ignition and fire.
3. Keep away from children.
4. In case of eye / skin contact, wash with plenty of water.
5. Inhalation / Injection will cause danger. In either case, move to fresh air & consult medical practitioners.
6. Do not apply when ambient temperature might drop to levels below 10°C within 4 hrs of application.
7. New plaster should be allowed to cure for minimum 12 weeks.
8. Avoid extra thinning for better results.
9. Can be tinted with Nerolac Hi-Power Universal Stainer before thinning. Do not add more than 5% of Nerolac Hi-Power Universal Stainer. Stir the tinted paint well. after tinting & before application.
10. The container must be tightly closed when not in use. Stir well and strain before use.
11. Use safety equipments like rubber or polythene gloves, safety goggles / glasses & face mask.

## POST APPLICATION INSTRUCTIONS

For removing stains, sponge clean with a mild soap solution and wipe clean. Ensure a drying time of 1 week before cleaning.

### SAFETY FEATURES:

Non-Flammable.

### PACK SIZES:

1 ltr, 4 ltrs, 10 ltrs, & 20 ltrs.

### SHADE RANGE:

As per Colorscapes Fandeck & Shade Card.

### NO. OF SHADES POSSIBLE:

More Than 1300

