




NEROLAC

EXTERIOR PRIMER

PRODUCT DESCRIPTION

Nerolac Exterior Primer is a water based wall coating suitable for application on exteriors as a primer to exterior emulsions.

FEATURES AND BENEFITS

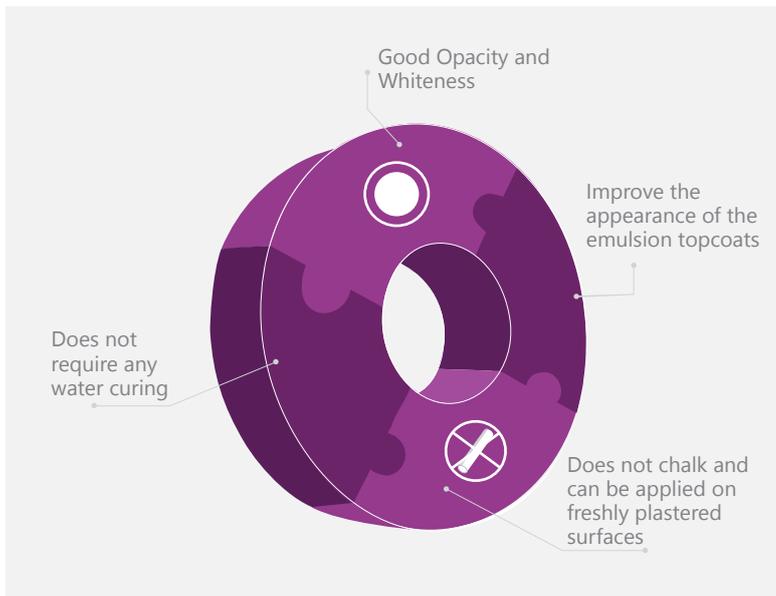

SURFACE PREPARATION

1

The surface to be painted must be free of all dust, grease, traces of paint flakes, algae, fungus, etc. The surface previously coated with paint must be cleaned thoroughly with a stiff coir brush, to remove dust, dirt chalking or any friable material. This ensures proper adhesion of the new paint system. In case of fungus affected area, apply a liberal coat of Nerolac Fungicidal Solution. Allow it to react for minimum 6-8 hrs. All structural cracks must be open in V-shape filled with White cement/cement based plasters, all leakage should be stopped, before actual painting. Freshly plastered surfaces must be allowed to cure completely. Apply top coats as follows.

RECOMMENDED USAGE

Nerolac Exterior Primer can be applied on a wide range of exterior cement plasters, exterior ceilings, asbestos sheet, concrete, etc. as a primer.

APPLICATION

1

Primer* (1Coat) DRY 4-6 hrs.

2

Subsequent finishing coat.#

Primer* = Nerolac Exterior Primer.

please look for the individual finishing system given in respective Product data sheet.

TECHNICAL DATA



COVERAGE ***

12.07-13.93 sq.mt/ltr/coat, when applied on normal masonry surface by brushing



DRYING TIME

Surface Dry 30 min



STABILITY OF THIN PAINT

Use within 24 hrs.



THINNING

100% by volume with water



FLASH POINT

NA



OVERCOATABILITY

4-6 hrs.
@27° +- 2°C & RH 60 ± 5%

** Actual covering capacity may vary depending upon the surface condition, temperature, wind velocity, application skills, surface roughness & surface porosity.

PRECAUTIONS



- Refer to MSDS for "Nerolac Exterior Primer" for safety measures & precautions
- Store in well ambient conditions, ventilated locations & away from sources of ignition and fire
- Keep away from children
- In case of eye/skin contact, wash with plenty of water
- Inhalation/injection is dangerous. In either case, move to fresh air & consult a medical practitioner
- Do not apply when ambient temperature might drop to a level below 10° C within 4hrs of application
- New plaster should be allowed to cure for minimum 12 weeks
- Avoid extra thinning for better results
- Do not use universal strainers. Stir well paint before application
- The container must be tightly closed when not in use. Stir well and strain before use
- Use safety equipment like rubber or polythene gloves, safety goggles/glasses & face mask

POST APPLICATION INSTRUCTIONS

Apply finishing coat within 7-8 days of primer application.

SHADE RANGE

White*

SAFETY FEATURES

Non-Flammable.

PACKAGING

1 ltr, 4 ltrs, 10 ltrs & 20 ltrs.